



Always one step ahead®

# MOWER AND MOWER-CONDITIONER BUTTERFLY SERIES - MOD. D 9600



# MOWER AND MOWER-CONDITIONER BUTTERFLY SERIES - MOD. D 9600



COMBINATION 1: FRONT & REAR MOUNTED



COMBINATION 2: REAR MOUNTED FOR BI-DIRECTIONAL TRACTORS



CUTTING HEIGHT MECHANISM



PERFECT GROUND ADAPTATION

Large area mowing and high volume harvesting are more and more important and the Tonutti combination mowers and mower-conditioners represent the ideal solution for contractors and large producers by optimizing mowing and drying time and by providing the highest forage quality.

The mower D 9600 F and the Mower Conditioner D 9600 FF are formed by three working modules, each with a working width of 10' 6" (3,20 m) for a total of 31' 6" (9,60 m) working width.

## MODULAR

The mower modules can be used to form two possible combinations:

♦ **COMBINATION 1: FRONT & REAR MOUNTED** offering the following advantages:

1. Driving comfort
2. Great visibility
3. Fast manoeuvrability
4. Enhanced productivity

♦ **COMBINATION 2: REAR MOUNTED** (with an additional kit available as an option) for bi-directional tractors with the following advantages:

1. Great tractor balance
2. Low horse power requirements

In both cases the rear mounted mower modules extend from the tractor for a maximum depth of only 7' 11" (2,40 m) and the front mounted module of only 3' 11" (1,20 m).

## TOTALLY INDEPENDENT


- ♦ Move both horizontally and vertically;
- ♦ Mounted on parallelogram attachment frame supports to perfectly follow the terrain contour;
- ♦ Equipped with independent suspensions to set ground pressure.

## INTERCHANGEABLE

- ♦ To have common parts
- ♦ For quick and easy maintenance.

# CHARACTERISTICS OF MOWER AND MOWER-CONDITIONER MOD. D 9600

1. CENTER OF MASS:  
attachment close to the tractor for a better weight distribution and limited turning circle.
2. PERFECT SETTING OF CUTTING POSITION:  
The parallelogram type of frame guarantees optimal ground tracking; releases the machine upwards in case of obstacles.
3. CUTTER BAR:  
the gear cutter bar with oil bath is built with the highest technical features to ensure:
  - ◆ LOW NOISE LEVEL
  - ◆ LONG-LIFEFurthermore, for a perfect cut, the cutter bar mounts oval discs with reinforced blades.  
The skid is manufactured in wear-resistant material.
4. CONDITIONER:
  - ◆ The conditioner mounts Y-shaped steel tines.
  - ◆ Can be disengaged in a matter of minutes.
  - ◆ The tines are mounted on flexible supports to resist to high pressure.
  - ◆ Conditioning intensity can be set by:
    1. reducing or increasing the distance between the tines and the conditioning hood (from 15 mm to 50 mm);
    2. changing the rpm's of the conditioner (from 800 to 1.250 rpm).
5. TRANSPORT:
  - ◆ Fast and easy hydraulic fold.
  - ◆ Good road visibility.
  - ◆ Possibility of working with one mower unit raised.

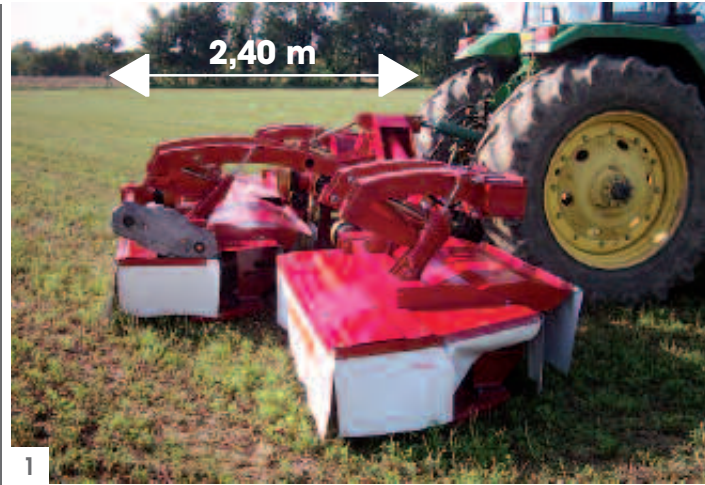


# MOWER AND MOWER-CONDITIONER BUTTERFLY SERIES - MOD. D 9600

8856U000

TECHNICAL SPECIFICATIONS	MOWER		MOWER-CONDITIONER
		D 9600 F	D 9600 FF
Working width	ft/m	31' 6" (9,60)	31' 6" (9,60)
Hitch		cat. 2/3	cat. 2/3
PTO	rpm	1000	1000
Number of discs		8x3	8x3
Number of blades		48	48
Conditioner			Y-shaped steel tines
Conditioner	rpm		800/1250
Windrow width	ft/m	7' 10" (2,40)	from 4' 3" (1,30) to 7' 11" (2,40)
Transport height	ft/m	11' 6" (3,50)	11' 6" (3,50)
Weight	lbs/kg	4400 (2000)	6600 (3000)
Tractor horse power	Hp/Kw	140 (103)	170 (125)
Required tractor hydraulic connections		2DA + 1SA	2DA + 1SA



TONUTTI reserves the right to make changes or add improvements at any time without notice. The information contained herein is general in nature and is not intended for specific application purposes.



**tonutti**<sup>®</sup>  
SINCE 1864  
Always one step ahead<sup>®</sup>



Patent pending

**Tonutti Italy**  
Via Gino Tonutti 3 - 33047  
Remanzacco (UD) Italy  
Tel. + 39 0432 667015  
Fax + 39 0432 668282  
info@tonutti.it  
[www.tonutti.it](http://www.tonutti.it)

**Tonutti U.S.A.**  
S&T Distributing, Inc.  
1909 Thomas Road  
Memphis, TN 38134  
Phone (901) 385 8841  
Fax (901) 385 8288  
info@tonuttiusa.com  
[www.tonuttiusa.com](http://www.tonuttiusa.com)

**Tonutti Russia**  
T. W. Limited  
3 Tekhnicheskaya Street  
Perm, 614070 Russia  
Phone 007 (3422) 909096  
Fax 007 (3422) 909096  
twltd@perm.ru