



THREE POINT HITCH HAY RAKES P SERIES

The TONUTTI P Rakes are the ideal solution for Hobby Farmers, Horse Farmers, for farmers who need to clean up on their property or in mountain areas due to its small dimensions and 3-point hitch mount.

Two finger wheels are mounted on each rake arm. The rake arms are independent from the rake frame and the rake frame is also independent from the rake head. Shock absorbing springs on the three point rake head relieves the ground pressure from the finger wheels. Each finger wheel consists of 40 heat treated tines made of high quality spring material, which guarantee a long lasting operation without breakage.

The simplicity of the P Series along with the independence of each component allow the rake to adapt itself perfectly to all kinds of uneven terrain. Together with the special shaped tines which filter all kinds of dirt and stones the P rake produces a perfectly clean windrow.


This rake requires very little maintenance. All Tonutti three point hitch hay rakes P series have standard parts that are interchangeable (finger wheels, head, arms and tines).

Tonutti also offers a rear mounted windrow turner with 2 or 3 finger wheels that easily turns the windrow to allow a better drying of the forage.


THREE POINT HITCH HAY RAKES P SERIES

8821U0001

SPECIFICATION	P2 T	P3 T	P4	P5	P6
Finger wheels	2	3	4	5	6
Finger wheels diameter	55" (140 cm)	55" (140 cm)	55" (140 cm)	55" (140 cm)	55" (140 cm)
Tractor horsepower	20 Hp (15 kW)	20 Hp (15 kW)	25 Hp (19 kW)	25 Hp (19 kW)	30 Hp (22,4 kW)
Tines diameter	6,4 mm	6,4 mm	6,4 mm	6,4 mm	6,4 mm
Maximun working width	4' (122 cm)	6' (183 cm)	7'6" (228 cm)	9'3" (282 cm)	11'4" (347 cm)
Weight	156 lb (71 kg)	220 lb (100 kg)	352 lb (160 kg)	407 lb (185 kg)	506 lb (230 kg)
Transport width	8'4" (250 cm)	10'8" (320 cm)	4'7" (140 cm)	7'4" (220 cm)	7'4" (220 cm)
Appropriate working speed	14 mph (22km/h)	14 mph (22km/h)	14 mph (22km/h)	14 mph (22km/h)	14 mph (22km/h)

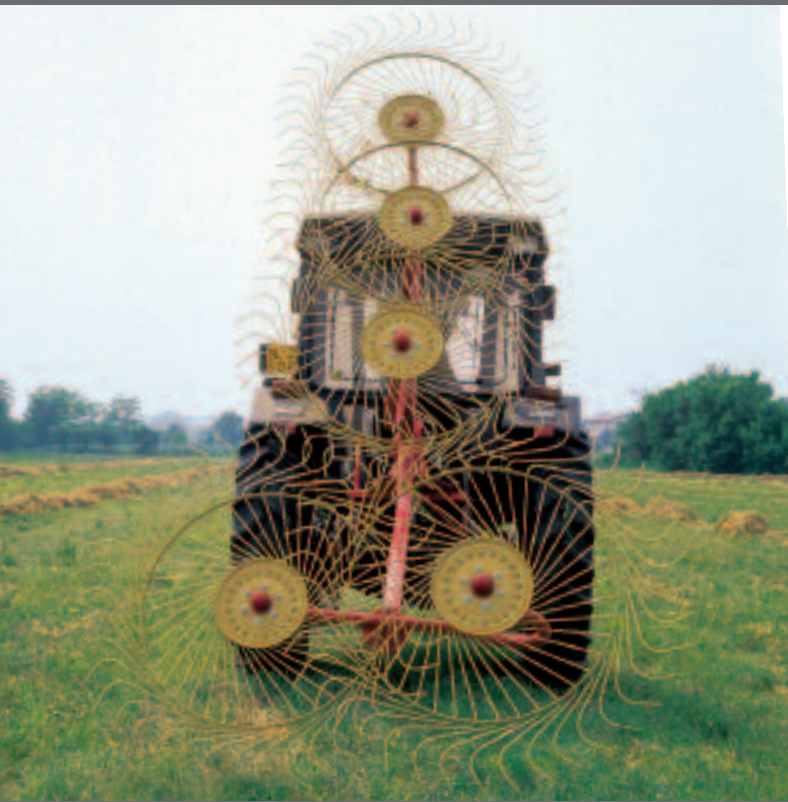

TONUTTI reserves the right to make changes or add improvements at any time without notice. The information contained herein is general in nature and is not intended for specific application purposes.



Patent number
5,313,772 - 5,231,829
Other patents pending

Tonutti Italy
Via Gino Tonutti 3 - 33047
Remanzacco (UD) Italy
Tel. + 39 0432 667015
Fax + 39 0432 668282
info@tonuttigroup.com
www.tonuttigroup.com

Tonutti U.S.A.
S&T Distributing, Inc.
1909 Thomas Road
Memphis, TN 38134
Phone (901) 385 8841
Fax (901) 385 8288
info@tonuttiusa.com
www.tonuttiusa.com

Tonutti Russia
T. W. Limited
3 Tekhnicheskaya Street
Perm, 614070 Russia
Phone 007 (3422) 909096
Fax 007 (3422) 909096
twltd@perm.ru